


GOB LED DISPLAY

ExplorLED®



Moisture-Proof

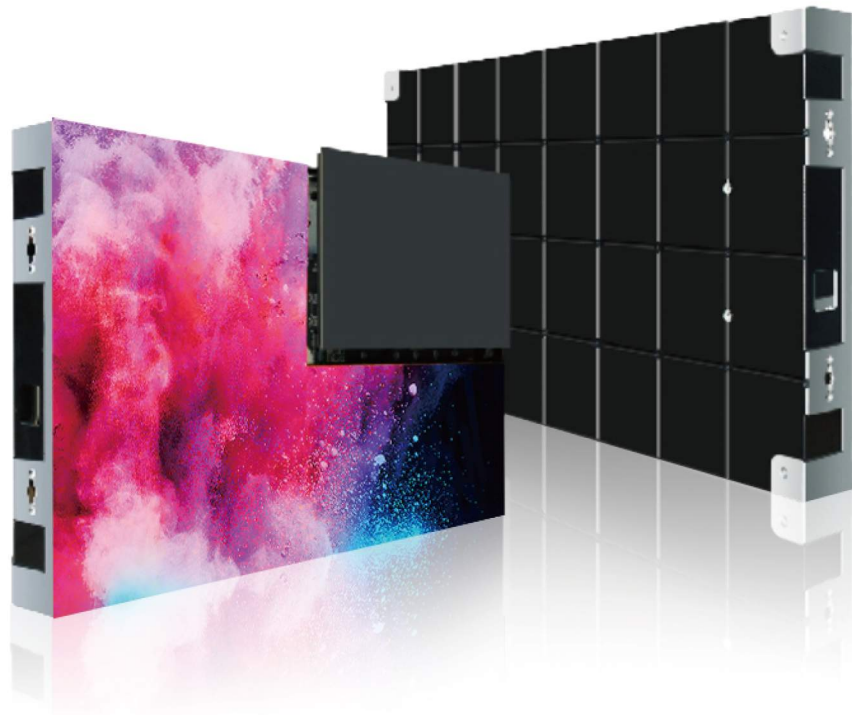

Water-Proof



Anti-Collision



Anti-Dust



Salt Spray Resistance



Anti-Static



Anti-Corrosion



Curve Installation

FEATURES

- With a high protection design to ensure the stability of the LED display for long-term use.
- Easy And Ultra-Fast To Build A Screen.
- Suitable for rental and fixed installations, can bring you the maximum value of a LED display.
- Can be wiped with rag when it is splashed and dirty.
- Can step on it and scratch it.
- Anti-crash, lamps won't be easy to be off or damaged.

SPECIFICATIONS



Technical Specifications	P1.579	P1.667	P1.875	P1.904	P2	P2.5	P3	P4
Pixel Pitch	1.579mm	1.667mm	1.875mm	1.904mm	2mm	2.5mm	3mm	4mm
Pixel Configuration	SMD1212	SMD1010	SMD1515	SMD 1515	SMD1515	SMD2121	SMD2121	SMD2121
Module Size	240*240mm	320*160mm	240*240mm	320*160mm	256*128mm	160*160mm	192*192mm	256*128mm
Module Resolution	152*152dots	192*96dots	128*128dots	168*84dots	128*64dots	64*64dots	64*64dots	64*32dots
Pixel Resolution	401,111dots/m ²	360,000dots/m ²	284,444dots/m ²	275,625dots/m ²	250,000dots/m ²	160,000dots/m ²	111,111dots/m ²	62,500dots/m ²
Cabinet Size	480*480*85mm	640*480*85mm	480*480*85mm	640*480*85mm	512*512*85mm	640*640*85mm	576*576*85mm	512*512*85mm
Cabinet Weight	8.0kg	9.2kg	8.0kg	9.2kg	8.5kg	12.3kg	10kg	8.5kg
Average Comfortable Viewing Distance	2.72m	2.92m	3.23m	3.27m	3.44m	4.3m	5.16m	6.88m
Brightness	600-800cd/m ²	600-800cd/m ²	600-800cd/m ²	600-800cd/m ²	600-800cd/m ²	400-800cd/m ²	600-800cd/m ²	500-600cd/m ²
View Angle	140°(W) 120°(H)	140°(W) 120°(H)	140°(W) 120°(H)	140°(W) 120°(H)	140°(W) 120°(H)	160°(W) 120°(H)	140°(W) 120°(H)	160°(W) 120°(H)
Refresh Rate	≥3,600HZ	≥3,840HZ	≥3,840HZ	≥3,840HZ	≥3,840HZ	≥3,200HZ	≥3,840HZ	≥3,840HZ
Input Voltage	AC110v-220V±10%	AC110v-220V±10%	AC110v-220V±10%	AC110v-220V±10%	AC110v-220V±10%	AC110v-220V±10%	AC110v-220V±10%	AC110v-220V±10%
Max.power Consumption	≤720W/m ²	≤690W/m ²	≤600W/m ²	≤600W/m ²	≤700W/m ²	≤710W/m ²	≤620W/m ²	≤700W/m ²
Avg. Power Consumption	240W/m ²	230W/m ²	200W/m ²	200W/m ²	280W/m ²	280W/m ²	260W/m ²	280W/m ²
Working Temperature	-20°C~+50°C	-20°C~+50°C	-20°C~+50°C	-20°C~+50°C	-20°C~+50°C	-20°C~+50°C	-20°C~+50°C	-20°C~+50°C
Storage Temperature	-30°C~+60°C	-30°C~+60°C	-30°C~+60°C	-30°C~+60°C	-30°C~+60°C	-30°C~+60°C	-30°C~+60°C	-30°C~+60°C
Working Humidity	10%-95%	10%-95%	10%-95%	10%-95%	10%-95%	10%-75%	10%-75%	10%-95%
Lifespan	100,000hours	100,000hours	100,000hours	100,000hours	100,000hours	100,000hours	100,000hours	100,000hours
Maintenance Mode	Front/Rear	Front/Rear	Front/Rear	Front/Rear	Front/Rear	Front/Rear	Front/Rear	Front/Rear

ExplorLED®


Shenzhen Explorled Optoelectronic CO., LTD

+86 13823155160

sales@explorerled.com

www.explorerled.com

Unit C, No.37, Baoshi West Road,
Longteng community, Shiyan street,
Baoan district, Shenzhen, China.

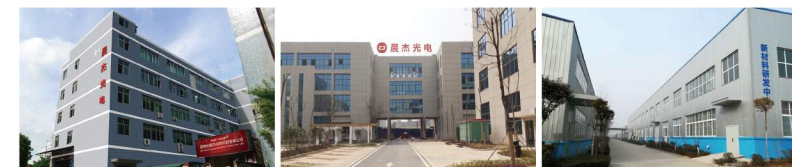

The Largest Manufacturer Of Ultra-High Definition (UHD) SMD LED Video Displays

